

LP600TM

DIGITAL WHEEL LOAD SCALE



CLASS IIII CERTIFICATE
#00-091PA1

ISO 9001
Registered

The Low Profile, Lightweight, Digital, Self-Contained, High-Capacity Wheel Load Scale From Intercomp!

The LP600 scale is designed to maximize legal payloads with concern for violations and reduction of maintenance due to overload stress on equipment.

Weighing a mere 49 lb/22 kg and only 1.5"/38 mm high, this sturdy, all aluminum, fully electronic, self-contained wheel load scale is capable of weighing loads up to 30,000 lb/15,000 kg with an accuracy of $\pm 1\%$.

The scale is fully battery operated and only requires infrequent recharging from a 12, 110, or 220 volt power source. A charger is provided.


Compact, hand-held infrared remote control enables user to control all functions of the scale from a standing position. Jumbo size 1 1/2" LCD display is readable from 25 feet/8 meters and automatically illuminates during use in low-light conditions.

For the purpose of obtaining an axle weight, it is possible to interconnect up to 32-LP600 scales. You can view the wheel or total weight of all interconnected scales at any location. Axle and axle group weights can be accumulated by using two or more scales. The scales are linked at the I/O terminal jack with an optional cable.

The I/O terminal can also transmit pertinent data to a printer or a display, such as Intercomp's S400HI ultra bright digital display. Also available are optional carrying cases that exceed government specifications.

We invite your most exacting questions on the capabilities of the LP600 Wheel Load Scale.

Intercomp[®]
advanced weighing technology . . . by any measure

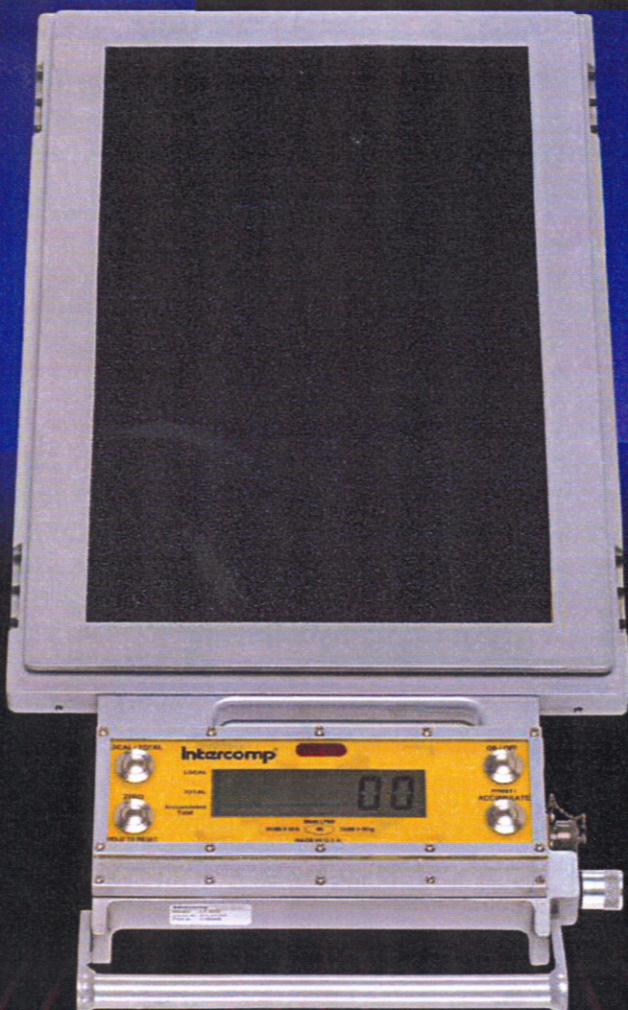

Infrared
Remote
Control



General

This scale is certified as a NTEP class III weighing device.

Data Interface: RS232, RS485

Batteries: 6 -1.2 volt ni-cads (standard), or alkalines

Battery Life: Approximately 1 year
(1500 charge/discharge cycles)

Battery duration between charges:

Approximately 25 hours of continuous use before the scale shuts itself off (These numbers are lowered by the use of the lamps or active current loop transmission)

Charging Voltage: 11.5 volts - 14.5 volts D.C.
Protection is provided for accidental reversal of the charging connections

Charging Current: Starts at 300mA and drops down to 50mA after 8 hours

Charging Time: 8 hours if the batteries are discharged to the point of turning off the scale

Accuracy: $\pm 1\%$

Operation: Infrared remote control or pushbutton

LP600DIGITALWHEEL LOADSCALE



LP600 System
with Notebook
Computer,
Battery Operated
Sheet Printer and
Carrying Case.

Options:

- Ramps
- Notebook Computer with Axle Weight Software
- Interconnect Cables for Totalizing and Printing Weights
- Weigh Pads (less indicator) for Tying Into Remote Indicator
- 220 volt 50Hz Battery Charger
- 2, 4, or 6 Weigh Pad Carrying Cases
- Dummy Weigh Pads for Leveling
- Printers for Printouts of Wheel, Axle, Axle Group, Gross Weight, Time and Date, etc.
- PT20 Axle Weigher CPU
- Factory Mutual
- PT Axle Weigher Indicator

"ACCUMULATE" Feature Printout

WHL 1: 7460 WHL 2: 7400
AXL 1: 14860
WHL 3: 10110 WHL 4: 10070
AXL 2: 20180
SUBTOTAL GRP 1: 35040
ACCUM TOTAL: 35040

WHL 1: 10110 WHL 2: 10070
AXL 1: 20180
WHL 3: 9800 WHL 4: 9500
AXL 2: 19300
SUBTOTAL GRP 2: 39480
ACCUM TOTAL: 74520



Specifications

AMBIENT

Humidity: 10 to 95% Non-Condensing

Temperature:

Operating -20° to 150°F / -28° to 65°C
Storage -40° to 170°F / -40° to 75°C

EMI/RFI: Meets Mil Spec 461

PHYSICAL

Overall

Dimensions: 1.5 x 30 x 16 inches / 38 x 762 x 406 mm

Platform: 22.4 x 15 inches / 569 x 381 mm

Weight: 49 lb / 22 kg.

Base &

Platform: Aerospace grade billet aluminum

Display: 1 inch / 25 mm LCD

ELECTRICAL

Voltage: Self-contained nickel cadmium batteries.
Integral recharger to charge or operate from a 12, 110, or 220 volt power source

OUTPUTS

Axle Totalizing:

Transmits weight to another scale for totalizing individual axles. Will totalize axles, tandem axles or wheel groups

Printers: RS232 or RS485 output to interface with a remote printer or display

CONTROLS

General: All controls are located on a waterproof keypad with large stainless steel switches

On/Off: Pushbutton On/Off

Zero/Test: Pushbutton zero checks for motion to HB-44
Test performs internal test

Local/Total: Displays local weight or group total

Print/

Accumulate: Prints or accumulates displayed weights

INDICATORS

Battery: Low battery

lb/kg: Unit of measure

Local/Total: Local weight or total of selected scales

Accumulated

Total: Total of all accumulated weights

FILTERING

Analog: 6 pole, 10 hertz low pass

Digital: Average of several internal weights gives steady readings for unstable load

Auto-Zero: Satisfies all HB-44 requirements

PERFORMANCE:

Speed: 950 milliseconds to typical reading (static)

Accuracy: $\pm 1\%$ of reading static mode

Units: lb, kg, programmable

Capacities:

30,000 lb/15,000 kg

20,000 lb/10,000 kg

10,000 lb/5,000 kg

5,000 lb/2,500 kg

Graduations:

50 lb/20 kg

5, 10, 20, 50, 100 lb/

2, 5, 10, 20, 50 kg

2.5, 10, 20, 50 lb/

1, 2.5, 10, 20 kg

1, 2.5, 10, 20 lb/

0.5, 1, 2.5, 10 kg

Other capacities and graduation sizes available.

Safe Overload: 150% of capacity.

CE ISO 9001
Registered

Web Site: www.intercomp.com
E-mail: info@intercomp.com

MDT

MD Techniek B.V.

Postbus 1041, 4700 BA Roosendaal
Neon 15 P, 4751 XA Oud Gastel
Tel.: 0165 318222 - Fax: 0165 318870
E-mail: info@mdtechniek.nl

Patents 4,813,504 and 4,979,581.

Specifications subject to change without notice.

LP600™ is a trademark of Intercomp Company.

Printed in the U.S.A.

Made In U.S.A.